

960~1000nm High Power PM Optical Isolator for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability
- Various Bandwidth
- High Optical Power

APPLICATIONS


- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Research Labs
- Laser Systems

SPECIFICATIONS

Parameter	Unit	Single Stage	Dual Stage D Type	Dual Stage L Type
Center Wavelength (λ_c)	nm	975, 980, 990, 1000		
Operating Wavelength Range	nm	+/-10		
Peak Isolation (Typ.)	dB	28	40	
Min. Isolation (23°C)	dB	22	35	
Typical Insertion Loss (λ_c , 23°C)	dB	0.9	1.1	1.3
Max. Insertion Loss (λ_c , 23°C)	dB	1.5	1.8	
Optical Return Loss (Input/Output)	dB	50/50		
Extinction Ratio (Min.)	dB	18		
Working Mode	S Type	-	Can only work in Slow Axis	
	F Type	-	Can work both in Slow Axis and Fast Axis	
Configuration	-	-	Standard: 2-Port; Y Type: 3-Port, Backward Power Guide Out	
Fiber Type	Input&Output	-	PM980 Fiber, PM1060L Fiber (E) or PM1060L-FA Fiber (L)	
		-	10/125um PMDC Fiber (O), 15/130um PMDC Fiber (W)	
	3 rd Port (Y Type)	-	20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)	
Fiber Tensile Load	N	5		
Max. Average Optical Power	W	0.3, 0.5, 1, 2, 3, 5, 10, 15, 20, 30, 50, 60, 80, 100, 150,		
Max. Peak Power for Pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20		
Max. Backward Optical Power (CW)	W	0.3, 0.5, 1, 2, 3, 5, 10		
Operating Temperature	°C	0~50		
Storage Temperature	°C	-20~75		

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.5dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Suggest to use Y type for >20W Optical Power or continuous backward power of $\geq 500\text{mW}$.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 - Package dimensions may be different for different optical power, fiber type and configuration.

PACKAGE DIMENSION

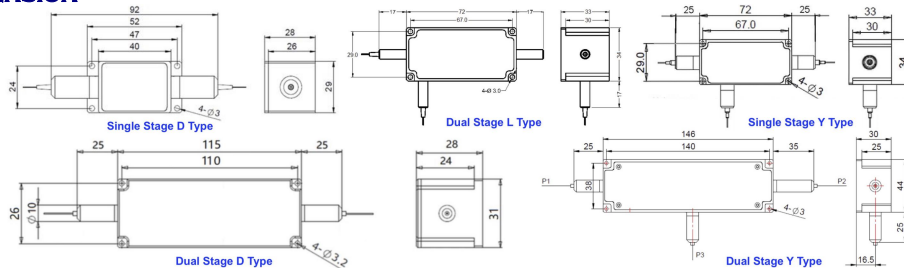

ORDERING INFORMATION (PN)

FPIS-NNNN	- (C)	C	(C)	-H	NN	P NN	- (NN)	- C	C	NN	-CC/CCC
Center Wavelength	Stage	Type	3 rd Port Fiber	Average Power	Peak Power	Backward Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type	
975-975nm	D=D Type	S=S Type	Y= Same Fiber	1-1W	01-100W	05-500mW	2-PM980Fiber	B= Bare Fiber	05-0.5m	N=Without Connector	
980-980nm	L=L Type	F=F Type	C= Corr. SM Fiber	3-3W	1-1kW	1-1W	E-PM1060L Fiber	L= Loose Tube	10-1.0m	FC/APC=FC/APC Connector	
990-990nm	Blank for Single		A=105/125um Fiber	10-10W	10-10kW	10-10W	Q=20/130 PMDC Fiber	2= 2mm Cable	15-1.5m	LC/PC=LC/PC Connector	
1000-1000nm			Blank for Standard	100-100W	20-20kW	Blank for 300mW	R=25/250 PMDC Fiber	3= 3mm Cable	20-2.0m	SC/APC=SC/UPC Connector	

