

1545nm High Power PM BP/Isolator Hybrid

FEATURES

- Low Insertion Loss
- High Reliability and Stability

APPLICATIONS

- Optical Amplifying Systems
- Telecommunication Networks



SPECIFICATIONS

Parameters	Unit	Single Stage	Dual Stage	H Stage
Center Wavelength	nm	1545		
Min. Pass Band Width @ 0.5dB	nm	3.0, 4.0, 10.0, 12.0		
Stop Band @25dB	3nm Bandwidth	nm	1510~1542 & 1548~1600	
	4nm Bandwidth	nm	1510~1540 & 1550~1600	
	10nm Bandwidth	nm	1510~1537 & 1553~1600	
	12nm Bandwidth	nm	1510~1532 & 1558~1600	
Insertion Loss@23°C	dB	≤1.3	≤1.5	≤1.7
Signal Isolation (23°C)	dB	≥28	≥40	≥22
Configuration	D Type	-	2-port	
	Y Type	-	3-port, (Blocked Wavelength Guide Out)	
	X Type	-	4-port, (Both Block Wavelength Guide Out)	
Fiber Type at 3 rd or 4 th Port (Y/X Type)	-	Same Fiber, Corr. SM Fiber or 50/125um MM Fiber		
ASE Direction	Forward Type	-	Bandpass Filter is before isolator	
	Backward Type	-	Bandpass Filter is after isolator	
	Twin Type	-	Bandpass Filter is at both sides of isolator	
Optical Return Loss/Extinction Ratio	dB	≥45 / ≥18		
Work Mode	S Type	-	Can only work in slow axis	
	F Type	-	Can work both in slow axis and fast axis	
Fiber Type	-	PM1550 Panda Fiber or 10/125um PMDC Fiber (O) 12/130um PMDC Fiber (T), 20/130um PMDC Fiber (Q) 25/250um PMDC Fiber (R) or 25/300um PMDC Fiber (G)		
Max. Optical Power (CW)	W	1, 2, 3, 5, 10		15, 20
Operating Temperature	°C	0~50		
Storage Temperature	°C	-40~85		
Package	Stainless Steel Tube (SST)	mm	(Ø)5.5x35 (≤5W); (Ø)6.0x48 (5~10W)	
Dimension	Metal Box	mm	(L)120x(W)12x(H)10	

Note: 1. Specifications are for device without connectors; Specifications may change without notice.


2. To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.

3. Suggest to use Y or X type if blocked optical power is >1W.

4. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.

5. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION (H STAGE)

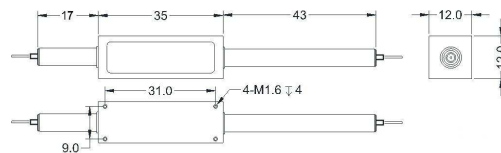

ORDERING INFORMATION (PN)

FHBP-1545-C NN C C - (C) (C) -HP NN -(C) C C NN -CC/CCC

Stage	Bandwidth	ASE Type	Work Mode	3rd Port Fiber	4th Port Fiber	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
S= Single Stage	30=3nm	F= Forward	S= S Type	Y=Same Fiber	Y=Same Fiber	1= 1W	M= Metal Box	2= PM1550 Fiber	B= Bare fiber	05=0.5m	N= Without Connector
D= Dual Stage	40=4nm	B= Backward	F= F Type	S= Corr. SM Fiber	S= Corr. SM Fiber	5= 5W	Blank for SST	0= 10/125 PMDC Fiber	L= Loose Tube	10=1.0m	FC/APC= FC/APC Connector
H= H Stage	100=10nm 120=12nm	T= Twin		5= 50/125um Fiber Blank for D Type	5= 50/125um Fiber Blank for D&Y Type	10=10W 20=20W	or >10W	T= 12/130 PMDC Fiber G= 25/300 PMDC Fiber	2= 2mm Cable 3= 3mm Cable	15=1.5m 20=2.0m	LC/PC= LC/PC Connector SC/UPC= SC/UPC Connector