

2000nm High Power PM BP/Isolator Hybrid

FEATURES

- Low Insertion Loss
- High Reliability and Stability

APPLICATIONS

- Optical Amplifying Systems
- Telecommunication Networks




SPECIFICATIONS

| Parameters | Unit | Single Stage | Dual Stage | H Stage |
|--|----------------------------|--|--|----------|
| Center Wavelength | nm | 2000 | | |
| Min. Pass Band Width @ 0.5dB | nm | 6.0 | | |
| Stop Band @25dB | nm | 1900-1990 & 2010-2050 | | |
| Insertion Loss@23°C | dB | ≤1.6 | ≤1.9 | ≤1.9 |
| Signal Isolation (23°C) | dB | ≥20 | ≥35 | ≥25 |
| Configuration | D Type | - | 2-port | |
| | Y Type | - | 3-port, (Blocked Wavelength Guide Out) | |
| | X Type | - | 4-port, (Both Block Wavelength Guide Out) | |
| Fiber Type at 3 rd or 4 th Port (Y/X Type) | - | Same Fiber, Corr. SM Fiber or 50/125um MM Fiber | | |
| ASE Direction | Forward Type | - | Bandpass Filter is before isolator | |
| | Backward Type | - | Bandpass Filter is after isolator | |
| | Twin Type | - | Bandpass Filter is at both sides of isolator | |
| Optical Return Loss/Extinction Ratio | dB | ≥45 / ≥18 | | |
| Work Mode | S Type | - | Can only work in slow axis | |
| | F Type | - | Can work both in slow axis and fast axis | |
| Fiber Type | - | PM1550 Panda Fiber or PM1950 Fiber (V) 10/130um PMDC Fiber (O) or 25/250um PMDC Fiber (R) | | |
| Max. Optical Power (CW) | W | 0.3, 0.5, 1, 2 | | 3, 5, 10 |
| Operating Temperature | °C | 0~50 | | |
| Storage Temperature | °C | -40~85 | | |
| Package | Stainless Steel Tube (SST) | mm | (Ø)5.5x35 | |
| Dimension | Metal Box | mm | (L)120x(W)12x(H)10 | |

See Drawing

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - Suggest to use Y or X type if blocked optical power is >1W.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION (H STAGE)

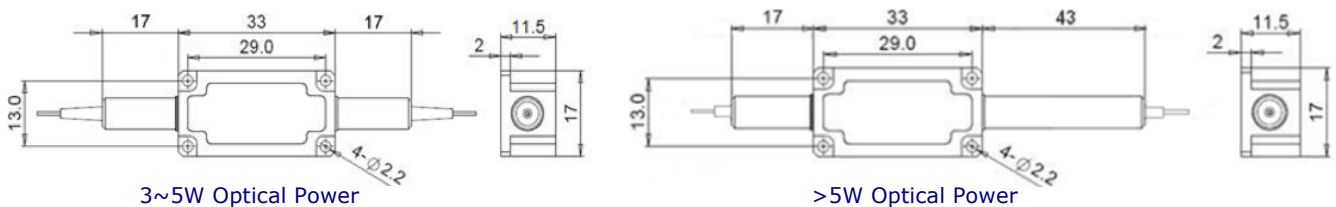

ORDERING INFORMATION (PN)

FHBP-2000-C NN C C - (C) (C) -HP NN -(C) C C NN -CC/CCC

| Stage | Bandwidth | ASE Type | Work Mode | 3rd Port Fiber | 4th Port Fiber | Optical Power | Package | Fiber Type | Fiber Sleeve | Fiber Length | Connector Type |
|-----------------|-----------|------------|-----------|------------------|--------------------|---------------|---------------|---------------------|---------------|--------------|-------------------------|
| S= Single Stage | 60~6nm | F= Forward | S= S Type | Y=Same Fiber | Y=Same Fiber | 03=300mW | M= Metal Box | 2=PM1550Fiber | B= Bare fiber | 05=0.5m | N=Without Connector |
| D= Dual Stage | | B=Backward | F= F Type | S=Corr. SM Fiber | S=Corr. SM Fiber | 1= 1W | Blank for SST | V=PM1950 Fiber | L= Loose Tube | 10=1.0m | FC/APC=FC/APC Connector |
| H= H Stage | | T=Twin | | 5=50/125um Fiber | 5=50/125um Fiber | 5= 5W | or >2W | O=10/130 PMDC Fiber | 2= 2mm Cable | 15=1.5m | LC/PC=LC/PC Connector |
| | | | | Blank for D Type | Blank for D&Y Type | 10=10W | | R=25/250 PMDC Fiber | 3= 3mm Cable | 20=2.0m | SC/UPC=SC/UPC Connector |

