

900~950nm High Power PM Isolator for Pulse Power

FEATURES

- High Isolation
- Epoxy-Free Optical Path
- High Reliability and Stability

APPLICATIONS


- Fiber Optic Amplifiers
- Fiber Optic Instruments
- Transmitters and Fiber Lasers

SPECIFICATIONS

Parameter	Unit	High Power Type
Center Wavelength (λ_c)	nm	915, 930, 940, 950
Operating Wavelength Range	nm	+/-10
Peak Isolation (Typ.)	dB	25
Min. Isolation (23°C)	dB	20
Typical Insertion Loss (λ_c , 23°C)	dB	1.3
Max. Insertion Loss (λ_c , 23°C)	dB	2.0
Optical Return Loss (Input/Output)	dB	45/45
Extinction Ratio (for FHIS)	dB	≥ 18
Fiber Type of Port 3	S Type	- Corresponding SM Fiber
	P Type	- Same Fiber to Port1&2, Slow axis align to Port 1
	Q Type	- Same Fiber to Port1&2, Slow axis is 45° to Port 1
Configuration	-	Standard: 3-Port; X Type: 4-Port, Backward Power Guide
Fiber Type of Port 1 & Port 2	-	PM850 Fiber, PM980 Fiber or PM1060L Fiber (E)
	-	10/125um PMDC Fiber (O), 15/130um PMDC Fiber (W)
	-	20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)
Fiber Type of 4 th Port (X Type)	-	Same Fiber, Corr. SM Fiber or 105/125um MM Fiber
Fiber Tensile Load	N	5
Max. Average Optical Power	W	0.3, 0.5, 1, 2, 3, 5, 10, 15, 20, 30, 50, 60, 80, 100
Max. Peak Power for Pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20
Max. Backward Average Power	W	0.3, 0.5, 1, 2, 3, 5, 10
Operating Temperature	°C	0~50
Storage Temperature	°C	-20~75

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.7dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Suggest to use Y type for >20W Optical Power or continuous backward power of ≥ 500 mW.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 - Package dimensions may be slightly different for different optical power.

PACKAGE DIMENSION

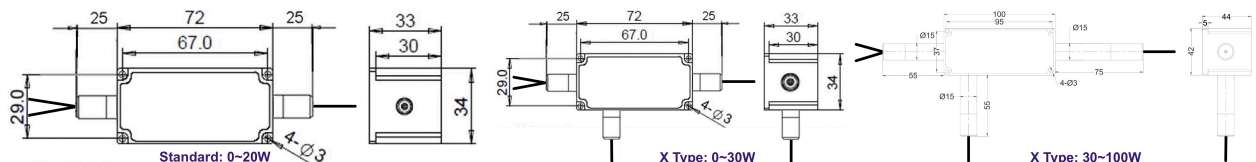

ORDERING INFORMATION (PN) FHIC=PBC/Isolator Hybrid; FHIS=PBS/Isolator Hybrid.

FHIC	- NNN	- C	(C)	-H NN	P NN	- (NN)	- C	C	NN	-CC/CCC
FHIS	Center Wavelength	3rd Port Fiber	4 th Port Fiber	Average Power	Peak Power	Backward Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
	915-915nm	S=S Type	Y= Same Fiber	05-500mW	01= 100W	05-500mW	2-PM850Fiber	B= Bare Fiber	05=0.5m	N=Without Connector
	930-930nm	P=P Type	A=105/125um Fiber	1-1W	1-1kW	1-1W	H-PM980 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
	940-940nm	Q=Q Type	Blank for Standard	10-10W	10-10kW	10-10W	E-PM1060L Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
	950-950nm			100-100W	20-20kW	Blank for 300mW	R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector