

# 1120nm High Power Collimating Isolator for Pulse Power

## FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

## APPLICATIONS


- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Transmitters and Fiber Lasers
- CATV Networks

## SPECIFICATIONS

Parameter	Unit	High Power Type
Center Wavelength ( $\lambda_c$ )	nm	1120
Operating Wavelength Range	nm	+/-10
Peak Isolation (Typ.)	dB	25
Min. Isolation ( $\lambda_c$ , 23°C)	dB	20
Typical Insertion Loss	dB	0.50
Max. Insertion Loss	dB	1.0
Min. Optical Return Loss	dB	45
Max. Polarization Dependent Loss	dB	0.15
Fiber Type	-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)
Nominal Output Beam Diameter	mm	0.5, 1, 2, 5 or customer specify
Max. Average Optical Power	W	1, 2, 3, 5 10, 15, 20, 30, 50, 80, 100
Max. Peak Power for Pulse	kW	0.1, 1, 2, 3, 5, 10, 20
Operating Temperature	°C	0~50
Storage Temperature	°C	-20~75

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
  2. To add connectors, IL is 0.5dB higher, RL is 5dB lower.
  3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
  4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
  5. Package dimension may be different for different beam diameter.

## PACKAGE DIMENSION

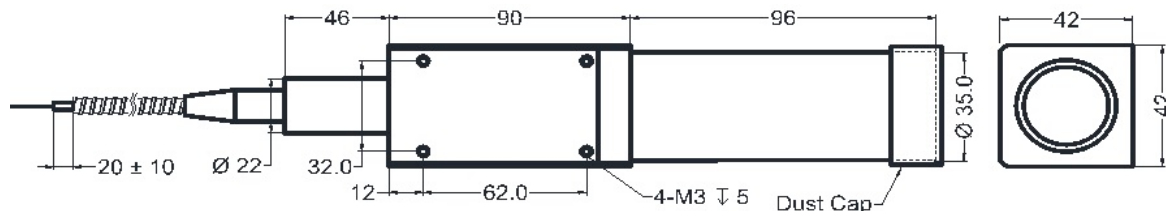

## ORDERING INFORMATION (PN)

FISO-	NNNN	-	NN	-H	NN	C	NN	-	(C)	C	NN	-	CC/CCC
Center Wavelength	Beam Diameter	Average Power	Peak Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type						
1120-1120nm	05= 0.5mm	03=300mW	01=100W	E=10/125um SC Fiber	B=Bare Fiber	05=0.5m	N=Without Connector						
	10= 1.0mm	1=1W	1= 1kW	Q=20/130um DC Fiber	L=Loose Tube	10=1.0m	FC/APC=FC/APC Connector						
	20=2.0mm	10=10W	5=5kW	R=25/250um DC Fiber	2=2mm Cable	15=1.5m	LC/PC=LC/PC Connector						
	50= 5.0mm	100=100W	20=20kW	Blank for HI1060 Fiber	3=3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector						