

2x2 Opto-Mechanical Multimode Switch

FEATURES

- Unmatched Low Cost
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- High Stability

APPLICATIONS

- Configurable Optical Networks
- Fiber Optic Instruments
- Optical Signal Routing
- Testing Instruments
- System Monitoring

SPECIFICATIONS

Parameters	Unit	Single Window	Dual Window
Working Wavelength	nm	850, 1310, 1480 1550, 1590, 1625	850&1310, 1310&1550 C+L(1520~1610)
Bandwidth	nm	+/-30	
Insertion Loss (23°C)	dB	≤1.2	≤1.4
Wavelength Dependent Loss	dB	≤0.30	≤0.50
Return Loss	dB	≥30	
Cross Talk	dB	≥35	
Switching Speed	ms	≤10	
Switch Type	-	Latching or Non-Latching	
Durability	cycle	≥10,000,000	
Repeatability	dB	≤+/-0.05	
Operating Voltage	V	3, 5	
Fiber Type	-	50/125um MM or 62.5/125 MM Fiber 50/125um OM3 MM Fiber	
Fiber Tensile Load	N	5	
Maximum Optical Power (CW)	mW	300	
Operating Temperature	°C	0~50	
Storage Temperature	°C	-40~85	

Note: 1. Specifications are for device without connectors; Specifications may change without notice.

2. To add connectors, IL is 0.3dB higher, RL is 10dB lower.

3. Devices for higher optical power or with other type fiber or consigned fiber are also available.

PIN CONFIGURATION


Latching Type:

Optical Path	Electrical Drive				Status Sensor			
	Pin 1	Pin 5	Pin 6	Pin 10	Pin 2-3	Pin 3-4	Pin 7-8	Pin 8-9
Path 1-4 & 2-3	V+	GND	NC	NC	Open	Close	Close	Open
Path 1-3 & 2-4	NC	NC	GND	V+	Close	Open	Open	Close

Non-Latching Type:

Optical Path	Electrical Drive				Status Sensor			
	Pin 1	Pin 5	Pin 6	Pin 10	Pin 2-3	Pin 3-4	Pin 7-8	Pin 8-9
Path 1-4 & 2-3	V+	NC	NC	GND	Open	Close	Close	Open
Path 1-3 & 2-4	NC	NC	NC	NC	Close	Open	Open	Close

PACKAGE DIMENSION

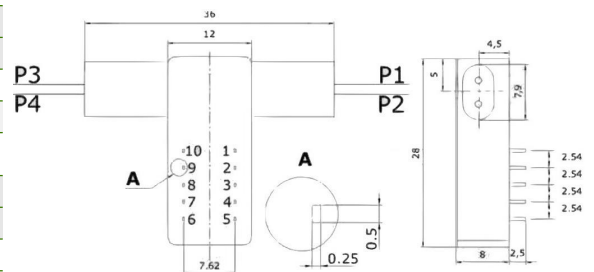

ORDERING INFORMATION (PN)

FMMS- NNNN - NN C N - C C NN - CC/CCC

Center Wavelength	Configuration	Latching	Voltage	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1310- 1310nm	22- 2x2 Type	L- Latching	3=3V	5= 50/125um MM Fiber	B= Bare Fiber	05=0.5m	N=Without Connector
1550- 1550nm		N=Non-Latching	5=5V	6= 62.5/125um MM Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
850- 850nm				3= OM3 MM Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
8513= 850nm&1300nm					3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector