

915/1020-1120nm High Power WDM/Isolator/Tap PM Hybrid

FEATURES

- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability

APPLICATIONS


- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks

SPECIFICATIONS

Parameters	Unit	Value	
Signal Wavelength Range λ_1	nm	1020 \pm 5, 1030 \pm 10, 1040 \pm 10, 1053 \pm 10, 1064 \pm 10, 1080 \pm 10, 1092 \pm 10, 1120 \pm 10	
Pump Wavelength Range λ_2	nm	915 \pm 10	
Excess Loss@23°C Signal Channel@ λ_1	dB	\leq 2.0	
Insertion Loss@23°C Pump Channel@ λ_2	dB	\leq 1.0	
Signal Tap Ratio	%	1 \pm 0.5%, 2 \pm 0.7%, 5 \pm 1.0%, 10%, 20%, 30%, 50%	
Signal Isolation (23°C, All SOP)	dB	\geq 20	
Wavelength Isolation	Signal Channel@ λ_2	dB	\geq 25
	Pump Channel@ λ_1	dB	\geq 12
Optical Return Loss	dB	\geq 45	
Extinction Ratio	dB	\geq 18	
Pump Direction	S Type	-	Forward Pump, Only Slow Axis Working
	F Type	-	Forward Pump, Both Axis Working
	B Type	-	Backward Pump, Only Slow Axis Working
Fiber Type	Common and Signal Port	-	PM850 Fiber, PM980 Fiber or PM1060L Fiber (E) 10/125um PMDC Fiber (O) or 15/130um PMDC Fiber (W) 20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)
		-	Same Fiber, Corr. SM Fiber, PM850 Fiber, HI780 Fiber, PM980 Fiber (M) or HI1060 Fiber (X)
	Tap Port	-	Same Fiber or Corr. SM Fiber
Fiber Tensile Load	N	5	
Max. Optical Power (CW)	W	0.5, 1, 2, 3, 5, 10, 15, 20	
Operating Temperature	°C	0~50	
Storage Temperature	°C	-40~85	

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.7dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION

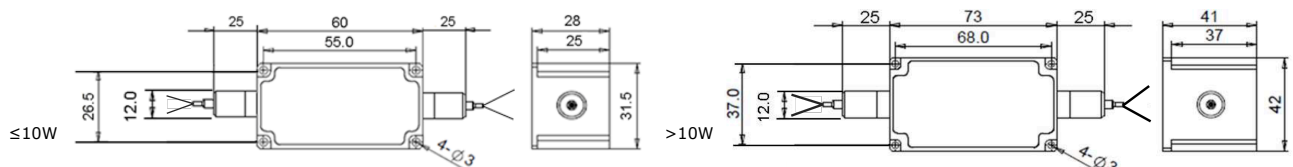

ORDERING INFORMATION (PN)

Wavelength	Pump Type	Tap Ratio	Pump Fiber	Tap Port Fiber	Optical Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
06=1064nm	S= S Type	01= 1%	P=PM850 Fiber	P=Same Fiber	05=500mW	2=PM850Fiber	B= Bare fiber	05=0.5m	N=Without Connector
03=1030nm	F= F Type	05=5%	Y=Same Fiber	S=Corr. SM Fiber	1= 1W	H=PM980 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
08=1080nm	B= B Type	10=10%	S=Corr. SM Fiber		10= 5W	E=PM1060L Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
12=1120nm		50=50%	H=HI780 Fiber		20=10W	R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector

