

1500~1600/2000nm High Power WDM/Isolator PM Hybrid Filter

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks




SPECIFICATIONS

Parameters	Unit	Single Stage	Dual Stage	H Stage
Signal Wavelength Range λ_1	nm	2000 \pm 20		
Pump Wavelength Range λ_2	nm	1530 \pm 20, 1550 \pm 20, 1570 \pm 20, 1590 \pm 20		
Insertion Loss	Signal Channel@ λ_1	dB	\leq 1.6	\leq 2.0
	Pump Channel@ λ_2	dB	\leq 1.0	
Signal Isolation (Signal Channel@ λ_1)	dB	\geq 16	\geq 35	\geq 25
Signal/Pump Wavelength Isolation	dB	\geq 25/12		
Optical Return Loss	dB	\geq 45		
Extinction Ratio	dB	\geq 18		
Work Mode	S Type	-	Can only work in Slow Axis	
	F Type	-	Can Work Both in Slow Axis and Fast Axis	
Fiber Type	Common & Signal Port	-	PM1550 Panda Fiber or PM1950 Fiber (V)	
			10/130um PMDC Fiber (O) or 25/250um PMDC Fiber (R)	
	Pump Port		Same Fiber or Corr. SM Fiber,	
Fiber Tensile Load	N	5		
Max. Optical Power (CW)	W	1, 2		3, 5, 10
Operating Temperature	$^{\circ}$ C	0~50		
Storage Temperature	$^{\circ}$ C	-40~85		
Package	Stainless Steel Tube (SST)	mm	(\varnothing) 5.5x35	
Dimension	Metal Box	mm	(L)120x(W)12x(H)10	

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

DIMENSION DRAWING (H STAGE)

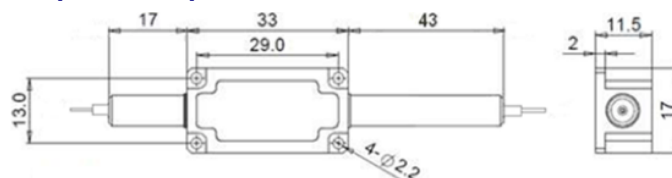

ORDERING INFORMATION (PN)

FPHW-NN	NN	-C	C	C	C	-HP NN	-(C)	C	C	NN	-CC/CCC
Pump WL	Signal WL	Stage	Pump Type	Work Mode	Pump Fiber	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
53=1530nm	20=2000nm	S=Single Stage	F=Forward	S= S Type	Y=Same Fiber	1= 1W	M=Metal Box	2= PM1550 Fiber	B= Bare fiber	05=0.5m	N=Without Connector
15=1550nm		D=Dual Stage	B=Backward	F= F Type	S=Corr. SM Fiber	3=3W	Blank for SST	V= PM1950 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
57=1570nm		H=H Stage				5=5W	or >2W	O=10/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
59=1590nm						10= 10W		R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector