

780~850/1900~1970nm WDM/Isolator PM Hybrid Filter for Pulse

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks




SPECIFICATIONS

Parameters		Unit	Single Stage	Dual Stage	H Stage
Signal Wavelength Range λ_1		nm	1900±10, 1930±20, 1950±20, 1970±20		
Pump Wavelength Range λ_2		nm	780+/-10, 793+/-10, 808+/-10, 830+/-10, 850+/-10		
Insertion Loss	Signal Channel@ λ_1	dB	≤1.6	≤2.0	≤2.0
	Pump Channel@ λ_2	dB	≤1.3		
Signal Isolation (Signal Channel@ λ_1)		dB	≥10	≥25	≥25
Signal/Pump Wavelength Isolation		dB	≥25/12		
Optical Return Loss		dB	≥45		
Extinction Ratio		dB	≥18		
Work Mode	S Type	-	Can only work in Slow Axis		
	F Type	-	Can Work Both in Slow Axis and Fast Axis		
Fiber Type	Common & Signal Port	-	PM1550 Panda Fiber or PM1950 Fiber (V)		
			10/130um PMDC Fiber (O) or 25/250um PMDC Fiber (R)		
	Pump Port		Same Fiber or Corr. SM Fiber, PM850 Fiber, PM780HP Fiber (7) or HI780 Fiber		
Fiber Tensile Load		N	5		
Max. Average Optical Power		W	0.3, 0.5, 1, 2		3, 5, 10
Max. Peak Power for pulse		kW	0.1, 1, 2, 5, 10, 15, 20		
Operating Temperature		°C	0~50		
Storage Temperature		°C	-40~85		
Package	Stainless Steel Tube (SST)	mm	(Ø)5.5x35		See Drawing
Dimension	Metal Box	mm	(L)120x(W)12x(H)10		

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.7dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

DIMENSION DRAWING (H STAGE)

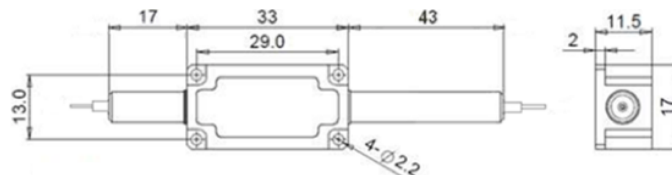

ORDERING INFORMATION (PN)

Pump WL	Signal WL	Stage	Pump Type	Work Mode	Pump Fiber	Average Power	Peak Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
78-780nm	90-1900nm	S=Single Stage	F=Forward	S=S Type	Y=Same Fiber	03=300mW	01=100W	M=Metal Box	2= PM1550 Fiber	B= Bare fiber	05=0.5m	N=Without Connector
79-793nm	93-1930nm	D=Dual Stage	B=Backward	F= F Type	P=PM850 Fiber	1= 1W	1= 1kW	Blank for SST	V= PM1950 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
81-808nm	19-1950nm	H=H Stage			H=HI780 Fiber	5=5W	10= 10kW	or >2W	O=10/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
85-850nm	97-1970nm				S=Corr. SM Fiber	10= 10W	20=20kW		R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector

