

980/1020-1120nm High Power PM WDM/Isolator Hybrid

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability

APPLICATIONS


- Fiber Laser Systems
- Optical Amplifying Systems
- Research Labs

SPECIFICATIONS

Parameters	Unit	Value	
Signal Wavelength Range λ_1	nm	1020 \pm 10, 1030 \pm 10, 1040 \pm 10, 1053 \pm 10, 1064 \pm 10 1070 \pm 10, 1080 \pm 10, 1092 \pm 10, 1103 \pm 10, 1120 \pm 10	
Pump Wavelength Range λ_2	nm	980+/-10	
Insertion Loss@23°C	dB	\leq 1.8	
Signal Channel@ λ_1	dB	\leq 0.8	
Pump Channel@ λ_2	dB	\leq 0.8	
Signal Isolation (23°C)	dB	\geq 20	
Wavelength	dB	\geq 25	
Signal Channel@ λ_2	dB	\geq 25	
Isolation	dB	\geq 12	
Pump Channel@ λ_1	dB	\geq 12	
Optical Return Loss	dB	\geq 45	
Extinction Ratio	dB	\geq 18	
Working Mode	S Type	-	Can only work in Slow Axis
	F Type	-	Can work both in Slow Axis and Fast Axis
Configuration	-	-	Standard: 3-Port; X Type: 4-Port, Backward Signal Guide Out
Fiber Type	Common and Signal Port	-	PM980 Fiber, PM1060L Fiber (E) or PM1060L-FA Fiber (L)
		-	10/125um PMDC Fiber (O), 15/130um PMDC Fiber (W)
		-	20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)
	Pump Port (980nm)	-	Same Fiber, Corr. SM Fiber, PM980 Fiber or HI1060 Fiber
4 th Port (X Type)	-	Same Fiber, Corr. SM Fiber or 105/125um MM Fiber	
Max. Optical Power (CW)	W	0.5, 1, 2, 3, 5, 10, 15, 20, 25, 30	
Max. Backward Signal Power (CW)	W	0.3, 0.5, 1, 2, 3, 5, 10	
Operating Temperature	°C	0~50	
Storage Temperature	°C	-20~75	

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.5dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 5. Package may be different for different optical power and configuration.

PACKAGE DIMENSION

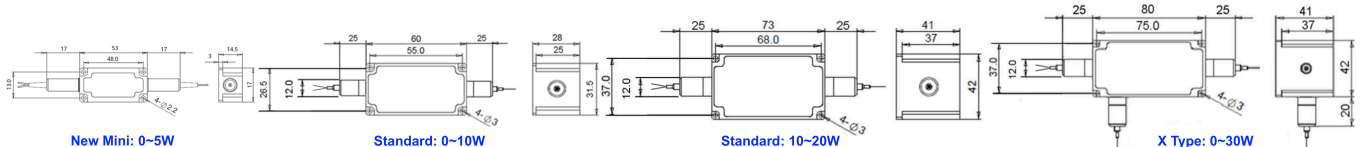

ORDERING INFORMATION (PN)

Wavelength	Pump Type	Work Mode	Pump Fiber	4 th Port Fiber	Optical Power	Backward Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
9806-980/1064nm	F=Forward	S=S Type	Y=Same Fiber	Y=Same Fiber	1=1W	05=500mW	2=PM980Fiber	B= Bare fiber	05=0.5m	N=Without Connector
9803-980/1030nm	B=Backward	F=F Type	P=PM980 Fiber	A=105/125um Fiber	5=5W	1=1W	E=PM1060L Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
9808-980/1080nm			H=HI1060 Fiber	E=New Mini Package	10=10W	10=10W	Q=20/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
9812-980/1120nm			S=Corr. SM Fiber	Blank for Standard	20=20W	Blank for 300mW	R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector