

2000nm PM Inline Optical Isolator for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability
- Various Bandwidth
- High Optical Power

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Laser Systems
- Research Labs




SPECIFICATIONS

Parameter	Unit	Single Stage	Dual Stage	H Stage
Center Wavelength (λ_c)	nm	2000		
Isolation ($\lambda_c \pm 20\text{nm}$, 23°C)	dB	≥ 20	≥ 35	≥ 25
Insertion Loss ($\lambda_c \pm 20\text{nm}$, 23°C)	dB	≤ 1.3	≤ 1.6	≤ 1.6
Optical Return Loss (Input/Output)	dB	50/45	50/45	50/45
Extinction Ratio	dB	≥ 18		
Working Mode	S Type	-	Can only work in Slow Axis	
	F Type	-	Can work both in Slow Axis and Fast Axis	
Fiber Type	-	PM1550 Panda Fiber or PM1950 Fiber (V) 10/130um PMDC Fiber (O) or 25/250um PMDC Fiber (R)		
Fiber Tensile Load	N	5		
Max. Average Optical Power	W	0.3, 0.5, 1, 2		3, 5, 10, 15, 20, 30, 40, 50, 60
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20		
Operating Temperature	°C	0~50		
Storage Temperature	°C	-20~75		
Package	Stainless Steel Tube (SST)	mm	$\phi 5.5 \times L35$	
Dimension	Metal Box-M	mm	$L120 \times W12 \times H10$	
See Drawing				

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 - Package size may be different for different power and fiber type.

PACKAGE DIMENSION (H STAGE)

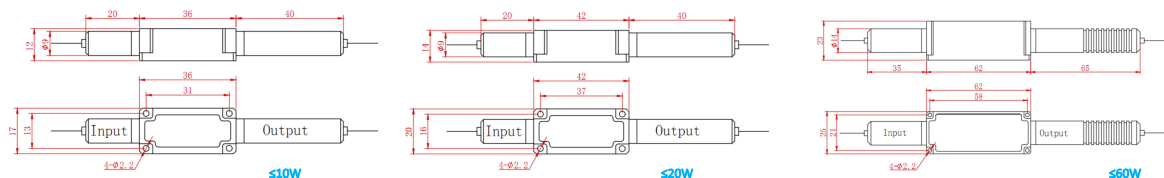

ORDERING INFORMATION (PN)

FPIS-NNNN	-C	C	-H NN	P NN	-(C)	C	C	NN	-CC/CCC
Center Wavelength	Stage	Type	Average Power	Peak Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
2000-2000nm	S= Single Stage	S= S Type	03=300mW	01= 100W	M= Metal Box	2=PM1550Fiber	B= Bare fiber	05=0.5m	N=Without Connector
	D= Dual Stage	F= F Type	1= 1W	1=1kW	Blank for SST	V=PM1950 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
	H= H Stage		10=10W	5=5kW	or >2W Power	O=10/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
			20= 20W	10=10kW		R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector

