

## 2030~2070nm PM Inline Optical Isolator for Pulse Power

### FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability
- Various Bandwidth
- High Optical Power

### APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Laser Systems
- Research Labs




### SPECIFICATIONS

Parameter	Unit	Single Stage	Dual Stage	H Stage
Working Wavelength ( $\lambda$ )	nm	2030 $\pm$ 20, 2050 $\pm$ 20, 2070 $\pm$ 10		
Isolation ( $\lambda$ , 23 $^{\circ}$ C)	dB	$\geq$ 16	$\geq$ 30	$\geq$ 25
Insertion Loss ( $\lambda$ , 23 $^{\circ}$ C)	dB	$\leq$ 1.3	$\leq$ 1.6	$\leq$ 1.6
Optical Return Loss (Input/Output)	dB	50/45	50/45	50/45
Extinction Ratio	dB	$\geq$ 18		
Working Mode	S Type	-	Can only work in Slow Axis	
	F Type	-	Can work both in Slow Axis and Fast Axis	
Fiber Type	-	PM1550 Panda Fiber or PM1950 Fiber (V) 10/130um PMDC Fiber (O) or 25/250um PMDC Fiber (R)		
Fiber Tensile Load	N	5		
Max. Average Optical Power	W	0.3, 0.5, 1, 2		3, 5, 10, 15, 20, 30, 40, 50, 60
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20		
Operating Temperature	$^{\circ}$ C	0~50		
Storage Temperature	$^{\circ}$ C	-20~75		
Package	Stainless Steel Tube (SST)	mm	$\Phi$ 5.5xL35	
Dimension	Metal Box-M	mm	L120xW12xH10	
See Drawing				

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
  - To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
  - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
  - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
  - Package size may be different for different power and fiber type.

### PACKAGE DIMENSION (H STAGE)

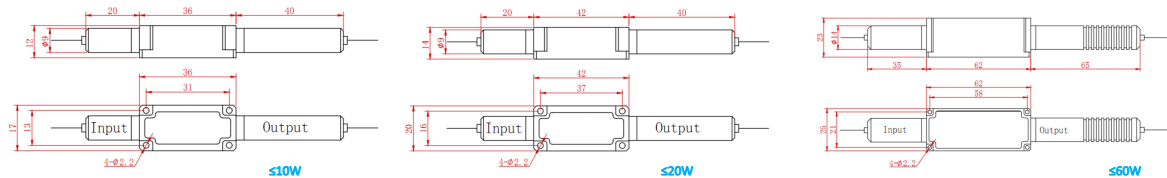

### ORDERING INFORMATION (PN)

FPIS-NNNN	- C	C	-H NN	PNN	- (C)	C	C	NN	- CC/CCC
Center Wavelength	Stage	Type	Average Power	Peak Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
2030= 2030nm	S= Single Stage	S= S Type	03=300mW	01= 100W	M= Metal Box	2=PM1550Fiber	B= Bare fiber	05=0.5m	N=Without Connector
2050= 2050nm	D= Dual Stage	F= F Type	1= 1W	1=1kW	Blank for SST	V=PM1950 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
2070= 2070nm	H= H Stage		5= 5W	5=5kW	or >2W Power	O=10/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
			10=10W	10=10kW		R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector

