

900-960nm Pump Laser Protector with Isolator

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS


- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks
- CATV Networks

SPECIFICATIONS

Parameters	Unit	Standard	High Signal Isolation
Pump Laser Wavelength	nm	915±15, 930±15, 940±15, 950±15	
Blocking Signal Wavelength	Type 6	nm	1020~1120
	Type 4	nm	1000~1120
	Type 5	nm	1500~1620
	Type 2	nm	1020~1120&1500~1620
Pump Insertion Loss@23°C	dB	≤1.5	≤1.8
Backward Pump Isolation@23°C	dB	≥22	
Backward Signal Attenuation	dB	≥25	≥45
Configuration	D Type	-	2-port
	Y Type	-	3-port, (Backward Signal/Pump Guide Out)
Return Loss	dB	≥50	
PDL	dB	≤0.2	
Fiber Type	Input&Output	-	HI780 Fiber, HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)
	3 rd Port (Only for Y Type)	-	Same Fiber or 105/125um MM Fiber
Fiber Tensile Load	N	5	
Max. Optical Power (Pump+Signal, CW)	W	1, 2, 3, 5, 10, 15, 20	
Max. Backward Signal/Pump Power (CW)	W	0.3, 0.5, 1, 2, 3, 5, 10	
Operating Temperature	°C	0~50	
Storage Temperature	°C	-20~75	

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.7dB higher, RL is 5dB lower.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 - Suggest to use Y/X type if blocked optical power is >1W.
 - Package size may be different for different optical power, fiber type and configurations.

DIMENSION DRAWING

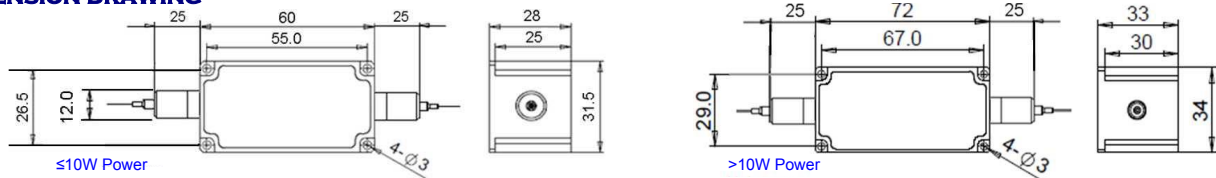

ORDERING INFORMATION (PN)

FSPI-NNN	-(N)	(C)	C	(C) - P	NN	-(NN)	-(C)	C	NN	-CC/CCC
Center Wavelength	Signal Type	Signal Isolation	B.Signal Fiber	B.Pump Guide Out	Optical Power	B.Signal/Pump Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
915-915nm	4-Type 4	I-High Isolation	Y-Same Fiber	P=Yes	1-1W	05-500mW	H-HI1060 Fiber	B-Bare fiber	05-0.5m	N-Without Connector
930-930nm	5-Type 5	Blank for Standard	A=105/125um Fiber	Blank for	5-5W	1-1W	E=10/125 SC Fiber	L-Loose Tube	10-1.0m	FC/APC=FC/APC Connector
940-940nm	2-Type 2		Blank for D Type	D Type or No	10-10W	5-5W	R=25/250 DC Fiber	2-2mm Cable	15-1.5m	LC/PC=LC/PC Connector
950-950nm	Blank for Type 6				20-20W	Blank for 300mW	Blank for HI780 Fiber	3-3mm Cable	20-2.0m	SC/UPC=SC/UPC Connector