

## 1610~1790nm High Power Manual VOA

### FEATURES

- ▣ Low Excess Loss
- ▣ Various Splitting Ratio
- ▣ Wide Passband
- ▣ High Stability and Reliability
- ▣ Epoxy Free Optical Path

### APPLICATIONS

- ▣ Optical Amplifier
- ▣ Optical Networks
- ▣ Power Monitoring
- ▣ Fiber Sensor
- ▣ Labs




### SPECIFICATIONS

Parameter	Unit	Value
Center Wavelength	nm	1625, 1650, 1700, 1750
Bandwidth	nm	+/-20
Max. Insertion Loss	dB	1.2
Attenuation Range	dB	0.8~30
Resolution (<10dB attenuation)	dB	0.2
PDL (at lowest attenuation)	dB	≤0.2
Optical Return Loss	dB	≥45
Fiber Type	-	SMF-28 Fiber or 10/130um DC Fiber (O) 12/130um DC Fiber (T) or 20/130um DC Fiber (Q) 25/250um DC Fiber (R) or 25/300um DC Fiber (G)
Fiber Tensile Load	N	5
Max. Thru Optical Power (CW)	W	1, 2, 3, 5, 10
Max. Attenuated Optical Power (CW)	W	2
Operating Temperature	°C	0~50
Storage Temperature	°C	-40~85

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
  2. To add connectors, IL is 0.3dB higher, RL is 5dB lower.
  3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
  4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

### PACKAGE DIMENSION

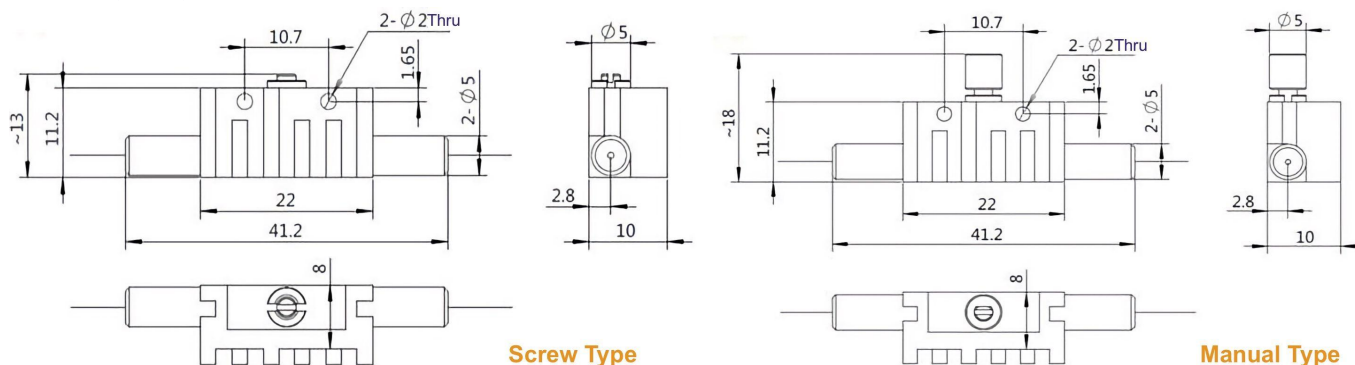

### ORDERING INFORMATION (PN)

<b>PMVA-NNNN</b>	-	<b>(C)</b>	<b>HP NN</b>	-	<b>(C)</b>	<b>C</b>	<b>NN</b>	-	<b>CC/CCC</b>
<i>Center Wavelength</i>		<i>Package</i>	<i>Optical Power</i>		<i>Fiber Type</i>	<i>Fiber Sleeve</i>	<i>Fiber Length</i>		<i>Connector Type</i>
1625~1625nm		M=Manual Type	1=1W		O=10/130 DC Fiber	B= Bare fiber	05=0.5m		N=Without Connector
1650~1650nm		Blank for Screw Type	2=2W		T=12/130 DC Fiber	L= Loose Tube	10=1.0m		FC/APC=FC/APC Connector
1700~1700nm			5=5W		G=25/300 DC Fiber	2= 2mm Cable	15=1.5m		LC/PC=LC/PC Connector
1750~1750nm			10=10W		Blank for SMF-28 Fiber	3= 3mm Cable	20=2.0m		SC/UPC=SC/UPC Connector

