

1040nm High Power Optical Isolator

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks
- CATV Networks




SPECIFICATIONS

Parameter	Unit	Single Stage	Dual Stage D Type	Dual Stage L Type
Center Wavelength (λ_c)	nm	1040		
Operating Wavelength Range	nm	+/-10		
Peak Isolation (Typ.)	dB	28	46	
Min. Isolation (23°C)	dB	22	40	
Typical Insertion Loss (λ_c , 23°C)	dB	0.8	1.0	1.2
Max. Insertion Loss (λ_c , 23°C)	dB	1.5	1.8	
Optical Return Loss (Input/Output)	dB	50/50		
Max. Polarization Dependent Loss	dB	0.15		
Configuration	-	Standard: 2-Port; Y Type: 3-Port, Backward Power Guide Out		
Fiber Type	Input&Output	-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)	
	3 rd Port (Y Type)	-	Same Fiber or 105/125um MM Fiber	
Fiber Tensile Load	N	5		
Maximum Optical Power (CW)	W	0.3, 0.5, 1, 2, 3, 5, 10, 15, 20, 30, 40, 50, 60, 80, 100, 150, 200		
Max. Backward Optical Power (CW)	W	0.3, 0.5, 1, 2, 3, 5, 10		
Operating Temperature	°C	0~50		
Storage Temperature	°C	-20~75		

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.5dB higher, RL is 5dB lower.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Suggest to use Y type for >20W Optical Power or backward power of $\geq 500\text{mW}$.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 - Package dimensions may be different for different fiber type, configuration and optical power.

PACKAGE DIMENSION

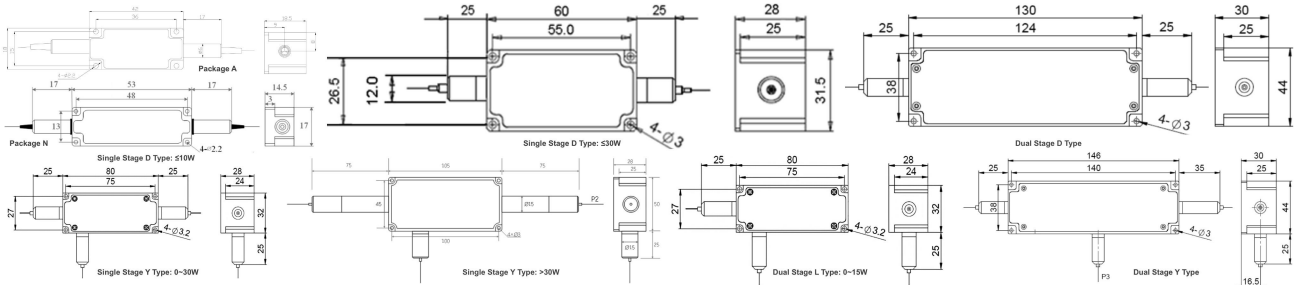

ORDERING INFORMATION (PN)

FISO-NNNN	-	(C)	(C)	-HP NN	-	(NN)	-	(C)	C	NN	-	CC/CCC
<i>Center Wavelength</i>		<i>Stage</i>	<i>3rd Port Fiber</i>	<i>Optical Power</i>		<i>Backward Power</i>		<i>Fiber Type</i>	<i>Fiber Sleeve</i>	<i>Fiber Length</i>		<i>Connector Type</i>
1040=1040nm		D=D Type	Y= Same Fiber	1=1W		05=500mW		E=10/125um SC Fiber	B= Bare Fiber	05=0.5m		N=Without Connector
		L=L Type	A=105/125um Fiber	3=3W		1=1W		Q=20/130um DC Fiber	L= Loose Tube	10=1.0m		FC/APC=FC/APC Connector
		N= Package N	Blank for Standard	10=10W		10=10W		R=25/250um DC Fiber	2= 2mm Cable	15=1.5m		LC/PC=LC/PC Connector
		Blank for Single		100=100W		Blank for 300mW		Blank for HI1060 Fiber	3= 3mm Cable	20=2.0m		SC/UPC=SC/UPC Connector